

Alfa Laval TL35

Gasketed plate-and-frame heat exchanger for a wide range of applications

Alfa Laval Industrial line is a wide product range that is used in virtually all types of industry.

The relatively tall plate makes this model suitable for duties with long temperature programs and when high heat recovery is appreciated. A large range of plate and gasket types is available.

Applications

- Biotech and Pharmaceutical
- Chemicals
- · Energy and Utilities
- Food and Beverages
- Home and Personal care
- HVAC and Refrigeration
- Machinery and Manufacturing
- Marine and Transportation
- Mining, Minerals and Pigments
- Pulp and Paper
- Semiconductor and Electronics
- Stee
- Water and Waste treatment


Benefits

- High energy efficiency low operating cost
- Flexible configuration heat transfer area can be modified
- Easy to install compact design
- High serviceability easy to open for inspection and cleaning and easy to clean by CIP
- Access to Alfa Laval's global service network

Features

Every detail is carefully designed to ensure optimal performance, maximum uptime and easy maintenance. Selection of available features:

- 5-point alignment system
- Reinforced hanger
- · Chocolate pattern distribution area
- Glued gasket
- Clip-on gasket
- Leak chamber
- Bearing box
- Fixed bolt head
- Key hole bolt opening
- Lifting lug
- Lining
- Lock washer
- Pressure plate roller
- Tightening bolt cover

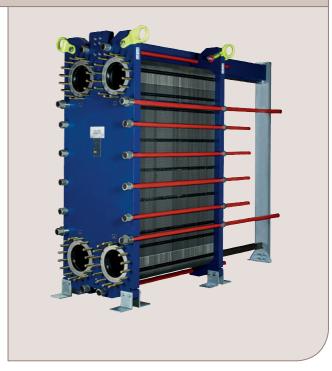

Extending performance

with Alfa Laval 360° Service Portfolio

Our extensive services ensure top performance from your Alfa Laval equipment throughout its life cycle. The availability of parts and our team's commitment and expertise bring you peace of mind.

Start-up

- Installation
- Installation Supervision
- Commissioning

Maintenance

- Cleaning Services
- Reconditioning
- Repair
 - Service Tools
- Spare Parts

Support

- Exclusive Stock
- Technical Documentation
- Telephone Support
- Training
- Troubleshooting

Improvements


- Equipment Upgrades
- Redesign
- Replacement and Retrofit

Monitoring

- Condition Audit
- Performance Audit

Dimensional drawing

Measurements mm (inches)

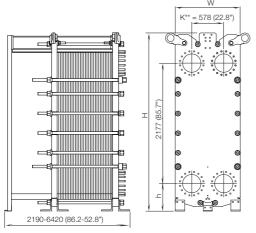

| Туре | Н | W | h |
|---------|---------------|--------------|-------------|
| TL35-FM | 3210 (126.4") | 1154 (45.4") | 488 (19.2") |
| TL35-FG | 3210 (126.4") | 1154 (45.4") | 488 (19.2") |
| TL35-FD | 3218 (126.7") | 1174 (46.2") | 496 (19.5") |
| TL35-FS | 3218 (126.7") | 1174 (46.2") | 496 (19.5") |

 $K^{**} = 578 \text{ mm } (22.8") \text{ except the following}$

| 584 (23.0") | FS PED | Size 350 DN40 |
|-------------|-----------------------|-------------------------|
| 589 (23.2") | FD PED, pvcALS, ASME, | Size 14" ASME class 300 |
| 589 (23.2") | FS PED/ASME | Size 14" ASME class |
| | F3 PED/ASIVIE | 300 or 400 |

The number of tightening bolts may vary depending on pressure rating.

 C^* = Larger design available on request.

Technical data

Plates

| Name | Type | Free channel, mm (inches) |
|--------|--------------|---------------------------|
| TL35-B | Single plate | 2.5 (0.098) |

Materials

| Heat transfer plates | 304/304L, 316/316L, 254 C-276 Ti |
|----------------------------|--|
| Field gaskets | NBR, EPDM |
| Flange connections | Carbon steel Metal lined: stainless steel, Alloy C-276, titanium |
| Frame and pressure plate | Carbon steel, epoxy painted |
| Traine and procedure plate | carbon croon, operty painted |

Other materials may be available on request.

All option combinations may not be configurable.

Operational data

| Max. design pressure (barg/psig) | Max. design temperature (°C/°F) |
|--|--|
| 10.0/145 | 180/356 |
| 6.9/100 | 177/350 |
| 16.0/232 | 180/356 |
| 10.3/150 | 177/350 |
| 16.0/232 | 180/356 |
| 25.0/363 | 160/320 |
| 20.7/300 | 177/350 |
| 25.0/362 | 180/356 |
| 27.6/400 | 177/350 |
| 30.0/435 | 180/356 |
| | pressure (barg/psig) 10.0/145 6.9/100 16.0/232 10.3/150 16.0/232 25.0/363 20.7/300 25.0/362 27.6/400 |

Extended pressure and temperature rating may be available on request.

Flange connections

| i larige confidentions | |
|------------------------|------------------------------------|
| FM, pvcALS | EN 1092-1 DN350/DN300 PN10 |
| | ASME B16.5 Class 150 NPS 14/NPS 12 |
| | JIS B2220 10K 350A/300A |
| FM, ASME | ASME B16.5 Class 150 NPS 14/NPS 12 |
| FM, PED | EN 1092-1 DN350/DN300 PN10 |
| | ASME B16.5 Class 150 NPS 14/NPS 12 |
| FG, pvcALS | EN 1092-1 DN350/DN300 PN16 |
| | ASME B16.5 Class 150 NPS 14/NPS 12 |
| | JIS B2220 16K 350A/300A |
| FG, ASME | ASME B16.5 Class150 NPS 14/NPS 12 |
| FG, PED | EN 1092-1 DN350/DN300 PN16 |
| | ASME B16.5 Class 150 NPS 14/NPS 12 |
| FD, pvcALS | EN 1092-1 DN350/DN300 PN25 |
| | ASME B16.5 Class 300 NPS 14/NPS 12 |
| | JIS B2220 20K 350A/300A |
| FD, ASME | ASME B16.5 Class 300 NPS 14/NPS 12 |
| FD, PED | EN 1092-1 DN350/DN300 PN25 |
| | ASME B16.5 Class 300 NPS 14/NPS 12 |
| FS, ASME | ASME B16.5 Class 300 NPS 14/NPS 12 |
| | ASME B16.5 Class 400 NPS 14/NPS 12 |
| FS, PED | EN 1092-1 DN300/DN350 PN25 |
| | EN 1092-1 DN300/DN350 PN40 |
| | ASME B16.5 Class 300 NPS 14/NPS 12 |
| - | ASME B16.5 Class 400 NPS 14/NPS 12 |
| | |

Standard EN1092-1 corresponds to GOST 12815-80 and GB/T 9115.

CHE00086EN 2016-04

Alfa Laval reserves the right to change specifications without prior notification.